



Lite

Boarding Ramp

avirAMP[®]
GROUND SUPPORT EQUIPMENT

THE GATEWAY TO STEP-FREE BOARDING



Lite

Boarding Ramp

Compact, versatile and LIGHT, hence its namesake!

The Lite was the first mobile boarding ramp introduced. All versions of the Lite share the same design, footprint and functionality, and all come with a suite of optional extras to make your own individual 'Lite' perfect for your particular operation, and its demands. It is simple in design, and easy to use.

Solar, Manual and Diesel versions available.





“

I was delighted with the Aviramp at Gatwick and it has given me back my confidence and enthusiasm for travel! I wish there were more of them around!

Helen Turner
passenger and UK resident

”

sales@aviramp.com

www.aviramp.com


At a Glance Features:

- Operating Spec: 1.0M-1.55M
- Solar, Manual or Diesel
- Gas strut assisted folding ramp making it compact to store
- One-person operation, simple and easy to use
- Manually or motorised operated hydraulic legs
- Virtually maintenance-free
- All weather anti-slip flooring
- Can be used directly against the aircraft or where there are permanent steps in place, a lightweight bridging platform can be used
- Opportunity to customise the standard unit with a raft of optional extras
- Full installation, assembly and training provided
- Aftersales care with warranty, maintenance and service plans for streamlining and peace of mind
- Purchase and leasing options available

For more information and to view our complete Aviramp product range visit;
www.aviramp.com

Lite

TECHNICAL SPECIFICATION

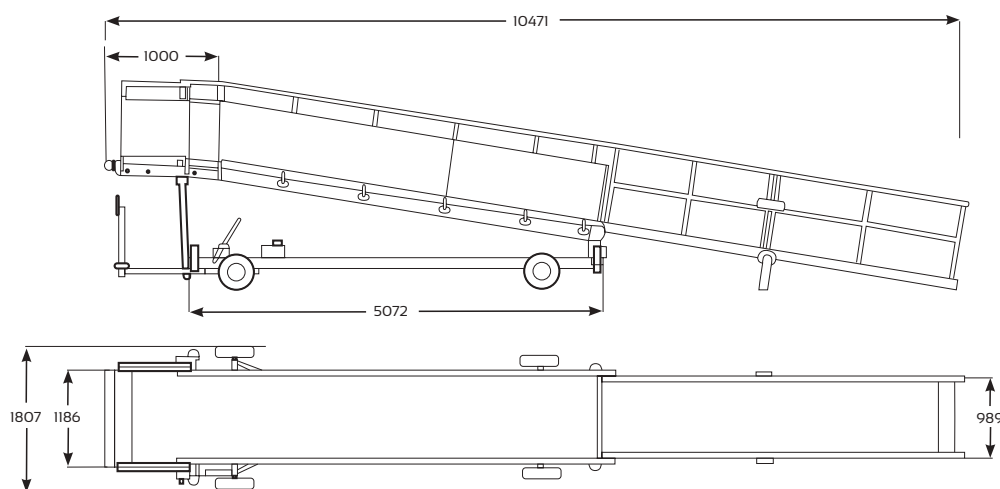

COMPLETE PRODUCT RANGE



	Manual Lite	Solar/Diesel Lite
Height Adjustment	Manual 1.0m (3' 3") up to 1.55m (5' 1")	Manual 1.0m (3' 3") up to 1.55m (5' 1")
Stabilisers	Manual hand pumped hydraulic legs	Electric pumped hydraulic legs
Tyres	Pneumatic	Pneumatic
Chassis	Galvanised Steel	Galvanised Steel
Ramp	All aluminium	All aluminium
Floor	Ribbed and serrated anti-slip	Ribbed and serrated anti-slip
Weight	650kgs (1430lbs) approx.	1050kgs (2315lbs) approx.
Ramp Angle	At maximum height 8.9°	At maximum height 8.9°
Wind Speed	21 metres/sec (70'/sec)	21 metres/sec (70'/sec)
PAX Load	3.2kN/sq. metre (720lbs/sq. yard)	3.2kN/sq. metre (720lbs/sq. yard)
Rear Ramps	Fold out, gas assisted	Fold out, gas assisted
Handrail	Plastic covered	Plastic covered

AVIRAMP • Stafford Park 15
Telford • United Kingdom TF3 3BB
+44 (0)1952 291 220
sales@aviramp.com
www.aviramp.com

aviramp[®]
GROUND SUPPORT EQUIPMENT

Aviramp[®] is a registered trademark and patented product range.