



Regional

Mobile Boarding Bridge



GROUND SUPPORT EQUIPMENT

THE GATEWAY TO STEP-FREE BOARDING



Regional

Mobile Boarding Bridge

Pioneering design and development, delivering the most streamlined experience.

The Regional has a unique patented 360° switchback design, mirroring the Continental in every aspect, except length. The Regional is smaller.

This mobile Boarding bridge is deployed on small to medium sized jets, such as the CRJ1000 through to the Boeing 737 (front door only).

Solar and diesel versions available.





“ We were one of the very first airports to commission Aviramp at Perpignan! To us it was a no brainer given the huge benefits for all stakeholders! We haven't looked back and have since added more!

Perpignon France ”

sales@aviramp.com

www.aviramp.com


At a Glance Features:

- Operating Spec: 1.6M-2.65M
- Solar or Diesel
- A pre-boarding facility
- One-person operation, simple and easy to use
- Patented 360° design with 7.5-8° gradient slopes
- Virtually maintenance-free
- All weather anti-slip flooring
- Can be used directly against the aircraft or where there are permanent steps in place, a lightweight bridging platform can be used
- Opportunity to customise the standard unit with a raft of optional extras
- Separate crew access
- Full installation, assembly and training provided
- Aftersales care with warranty, maintenance and service plans for streamlining and peace of mind
- Purchase and leasing options available

For more information and to view our complete Aviramp product range visit;
www.aviramp.com

Regional

TECHNICAL SPECIFICATION

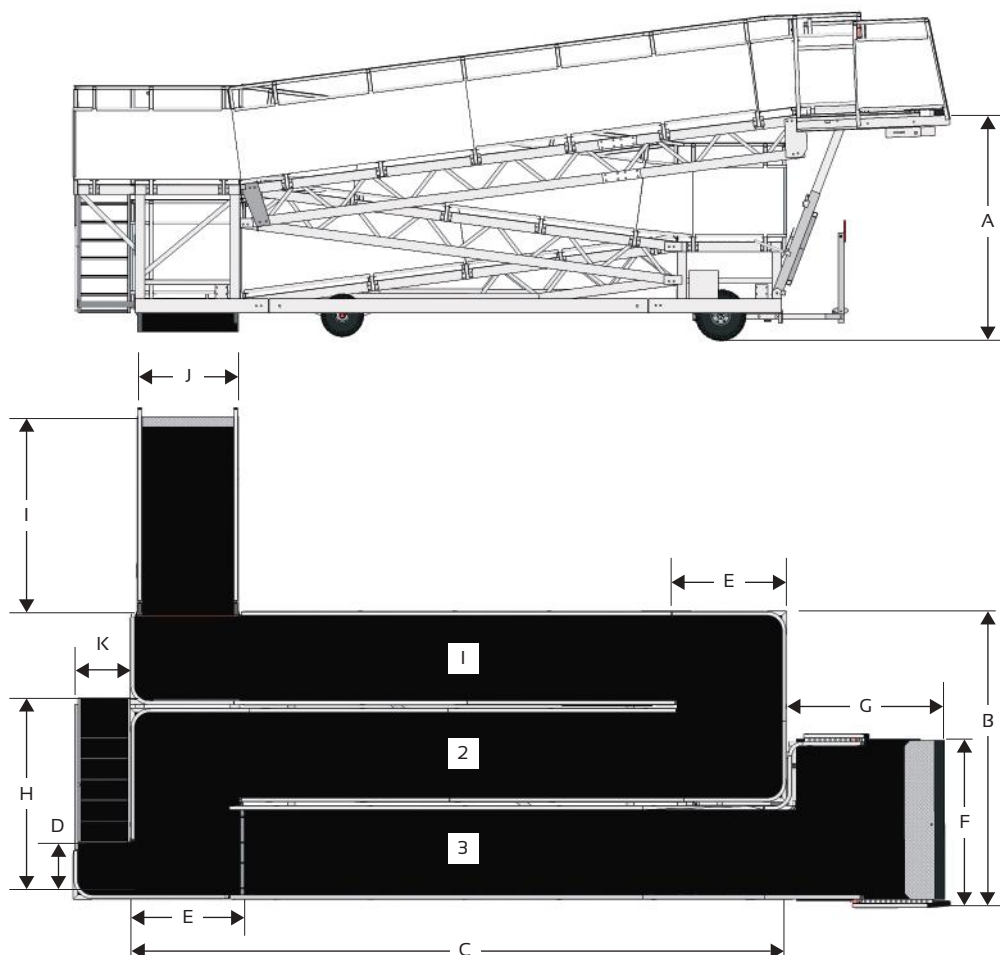

COMPLETE PRODUCT RANGE



	A		B	C	D	E	F	G	H	I	J	K
	Min	Max										OPTIONAL
REGIONAL	160	265	295	680	88.5	110	180	160	190	190	106	55

	RAMPS			ANGLE (°)	POWER SOURCE		STRUCTURE			WEIGHT Approx (tonnes)
	1	2	3		Diesel	Solar	Chassis	Ramp	Sides	
REGIONAL	490	490	600	7.5	✓	✓	S	A	P	2.1

S = Galvanised steel A = Aluminium (Floor Anodised Black) P = Laminated plastic and aluminium

	TURNING CIRCLE	TOW SPEED MAX	POWER SPEED		HYDRAULIC/ MANUAL			All units have a 10° swivel, sprung and padded docking plate. Single wheel hydraulic drive motor.
			Forward	Back	Drive	Lift	Legs	
REGIONAL	10.5m	10Kmh/h	Adjustable up to 5km/h on all models		H	H		

All dimensions are in cm unless otherwise stated.

AVIRAMP • Stafford Park 15
Telford • United Kingdom TF3 3BB
+44 (0)1952 291 220
sales@aviramp.com
www.aviramp.com

aviramp
GROUND SUPPORT EQUIPMENT

Aviramp® is a registered trademark and patented product range.